



FEATURES

- Programmable control inputs
- Ready for ESTA applications
- For use with TRD 8001 remote display
- RS485 (Modbus RTU) and USB interface

BENEFITS

- ▶ Transmits flow rate, total, density or temperature
- ▶ Economy version
- ▶ Simple meter configuration
- ▶ Easy interfacing with TRICOR configuration tool

SPECIFICATIONS

Supply Voltage:	24 V DC
Power Consumption:	max. 4 W
Interfaces:	RS485, USB (option)
Housing Material:	Aluminum
Protection Class:	IP65
Programming:	via TRD 8001 or via interface

ANALOG OUTPUT

Current Output:	4 ... 20 mA active
Output Value (programmable):	flow, total mass, total volume, density, temperature

PULSE OUTPUT

Frequency Range:	0.5 - 10.000 Hz for ESTA (OPTV receiver): 0.5 - 5,000 Hz
Output Signal:	active push-pull output for flow rate optional: isolated optical pulse output

STATUS IN- AND OUTPUT

Status Output:	push pull programmable (option) in TOTAL mode: 0.5 - 100 Hz
Control Input (programmable):	Standard: 1 input/option: 2 inputs optional: insulated optical control input

TEMPERATURE

Ambient Temperature:	-40 °C ... +70 °C [-40 °F ... +158 °F]
Storage and Transport:	-40 °C ... +80 °C [-40 °F ... +176 °F]

CONNECTIVITY


Electrical Connections:	connectors M12
-------------------------	----------------





CLASSIC Series | TCE 6000 Coriolis Transmitter

A)

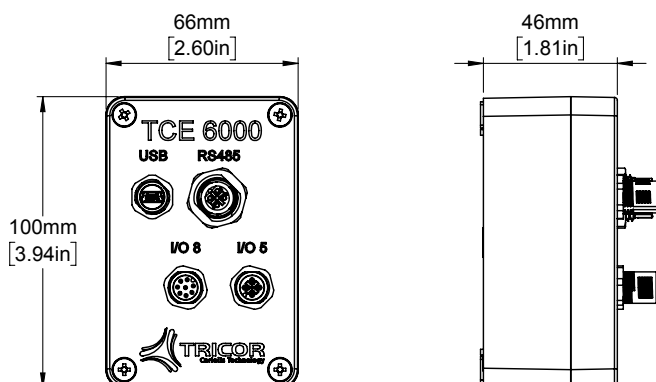

METER DIMENSIONS

A) Meter-Mount Electronics

APPROVALS & CERTIFICATIONS

Hazardous area

ATEX ¹⁾	Zone 2: II 3G Ex nA IIC T2...T4 Gc
--------------------	---------------------------------------

¹⁾ Only if powered by an SELV supply.

EMC

EN 61000-6-4
EN 61000-6-2

www.tricorflow.com

N & S AMERICA
AW-Lake Company
2440 W. Corporate Preserve Dr. #600
Oak Creek WI 53154 | USA
+1 414 574 4300

ASIA PACIFIC & MIDDLE EAST
KEM Küppers Elektromechanik GmbH
1 Magazine Road #04-01
Central Mall Office Tower
Singapore 059567
+65 6347 6162

CHINA
KEM flow technology (Beijing) Co., Ltd.
Rm. 906, Block C, Ruipu Office Bldg, No. 15
HongJunYingNan Road
Chaoyang District, Beijing 100012 | China
+86 10 84929567



REST OF WORLD
KEM Küppers Elektromechanik GmbH
Liebigstraße 5
85757 Karlsfeld | Germany
+49 8131 59391-100